




# OPERATING INSTRUCTIONS



## 1. Tool Adjustment:

Before use, check the tool position by switching the mixer ON and OFF shortly. The tool should scrape the side of the bucket slightly and run free from the bottom of the bucket. The scraper on top of the tool should lightly scrape over the top of the bucket, thus performing a cleaning action during mixing.

- To adjust the tool sideways loosen bolts (A), move the tool into the correct position and retighten the bolts.
- To adjust the tool height, use screws (B)

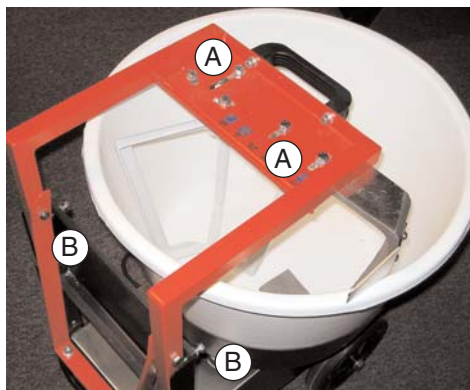

## 2. Mixing procedures

- Place the bucket on the machine and rotate it until you feel it "lock".
- Swivel the tool into the bucket.
- Fill the bucket with water as per the manufacturer's instructions.
- Switch the machine ON.
- Place the bag on the tool bracket.
- Cut the bottom of the bag open and slowly start pouring the powder into the bucket.
- Mix the material until a homogeneous mass is formed. Add water or powder if necessary.
- Switch the machine OFF and take the tool out of the bucket.
- Clean the tool immediately after you finish mixing. Never leave the tool in the bucket.

## 3. Motor Protection

The motor is equipped with a thermal safety switch. If the motor is overloaded, the machine will automatically switch OFF. The machine can be switched ON again after a few minutes when the motor has cooled down.

## Other Accessories for the DalTool® Automixer® DM12

White Bucket 12 gal.

Part # 9999 542647

Black Bucket 12 gal.

Part # 9999 542648